

Desktop foiling and lamination from one compact unit



**Easily add decorative creativity
to printed sheets with ColorFlare**

Laminates | Foils | Holographics

- Foiling, lamination and flaring effects are possible with this single desktop solution
- Class leading affordability
- Uses 3" core rolls providing more cost effective production
- No need to have traditional UV coating for diverse effects
- Simple in-house process - no expensive blocks or dies required



SEE FULL SYSTEM
SPECIFICATION
OVERLEAF

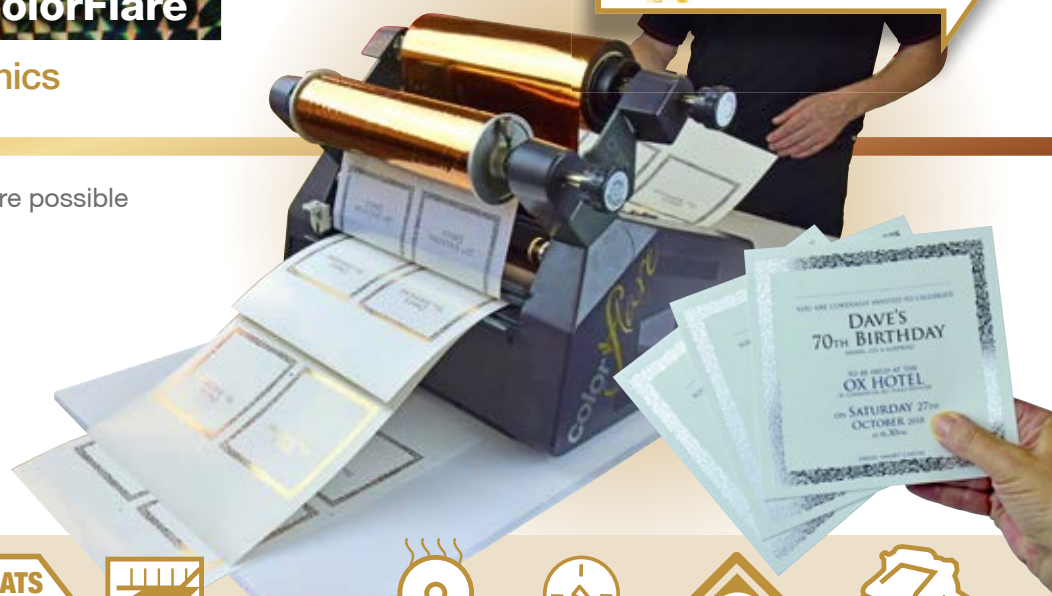

TOP FEATURES


- Ideal entry level machine for:
 - gloss & matt lamination
 - over-printable soft touch lamination
 - gloss & matt lamination
 - metallic & colored foiling
 - holographic effect films
- Handles Tabloid Extra + media
- Easy continuous feed
- Adjustable pressures for different applications
- Tension control
- De-curling bar for flatter sheets
- Heated top and bottom rollers designed to apply overall heat to substrates - avoids silvering of laminates
- Auto stop function to save foil waste
- Cutting knife for end of job trimming
- Air cooling offers a wider media range
- Quiet operation
- Uses conventional household 220~240V power supply

TYPICAL APPLICATIONS

- Packaging
- Presentation folders
- Business cards
- Certificates
- Menus
- Book covers
- Wedding stationery
- Labels
- Swing tickets
- Point-of-sale
- Photo albums
- Gift vouchers



Easy to use controls

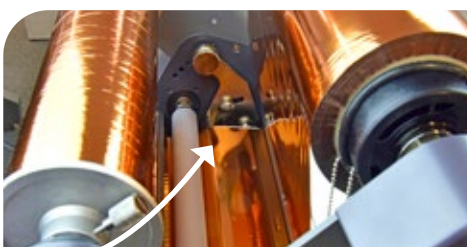

De-curl bar



Air cooling system



Tension control



Adjustable pressure



ColorFlare printer compatibility guide*

intec
PRINTING SOLUTIONS

Intec ColorFlare has been developed to work with the Intec ColorSplash series and is compatible with the world's top digital printer manufacturers.



Canon



RICOH
imagine. change.

Kodak




*Call for confirmation of model compatibility

Technical specifications*

Laminating speed	51"/min
Base substrate thickness	Lamination: 80gm ² to 350gm ² Foiling: 120gm ² to 350gm ²
Paper Size	Maximum: 12.99" to 19.68" Minimum: 7.06" x 9.05"
Warm-up time	5 minutes
Heating system	Infrared heater
Laminating temperature	Top roller: maximum 302°F Bottom roller: maximum 212°F
Temperature control	Control panel push button
Speed control	Control panel push button
Display system	LCD display
Roller pressure	Adjustable manual handle
Film core size	3"
Air cooling system	Dual fan system
Temperature sensing method	Internal thermo-couple
Rear trimming knife	Blade for end of job trimming
Power requirement	AC 220~240V, 50/60Hz, 7A
Power consumption	1.5kw

CF350 footprint

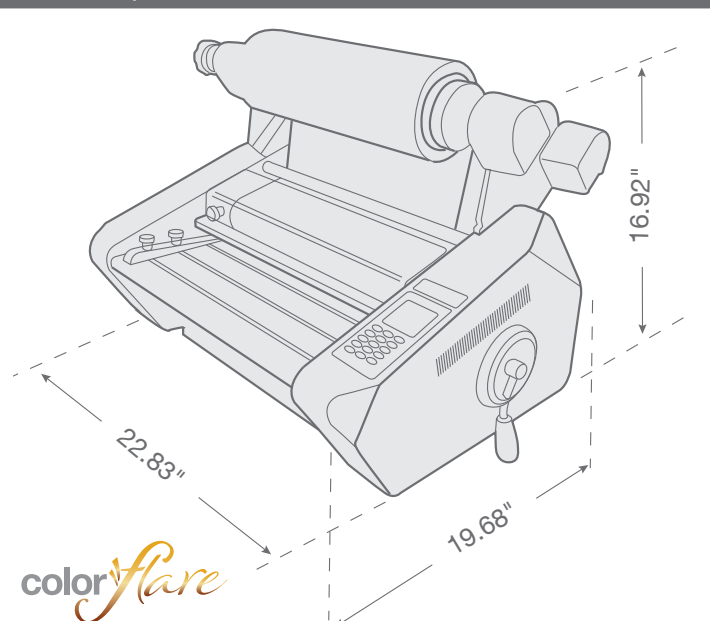

Dimensions W x L x H	Weight (lbs)
22.83" x 19.68" x 16.92"	77.16 pounds

A growing range of consumables...*

Lamination films

Various finishes including: gloss, matt and soft touch, for litho and digital print. Digital laminates are corona-treated for subsequent over-printing.

Foil flaring films


Available in a growing range of colors including: gold, silver, red, green, blue, violet, black, white and clear gloss. All can be applied direct to print.

Holographic flaring films

Such as: sparkle, milky way, crystal, carbon fibre... Perfect for adding premium effects to print.

*See consumables support sheet.

Speed chart

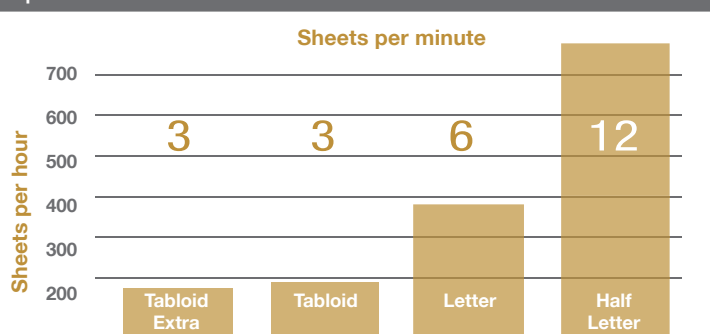

Laminates



Foils and films

